

# YOUR BEST PARTNER IN PACKAGING

Ilapak is once again showing its commitment to the bakery industry with the launch of this new flow wrapper for tortilla and flatbread applications.

Responding to the budget and performance demands of mid-sized bakeries, the Delta EZ combines an affordable price tag with the ability to produce hermetically sealed extended shelf life packs at speeds of up to 100ppm, thanks to an innovative longitudinal sealing system.



## TECHNICAL SPECIFICATIONS

Machine Speed	Up to 100 cycles per minute. Production output depends on film sealability and product characteristics.
Product Dimensions	
LENGTH	Up to 650mm - 25.6" standard
WIDTH	300mm - 11.8" standard (jaws 345mm - 13.6") 360mm - 14.2" on request (jaws 445mm - 17.5")
HEIGHT	Up to 100mm - 4.0" standard
Film Cut-Off	Min 150mm - 6" / Max 800mm - 31.5" Depending on film and product characteristics.
Wrapping Materials	Shrink barrier films, laminated, co-extruded and all sealable films.
Film Reel Dimensions	
COREØ	76.2mm - 3" standard 152.4mm - 6" on request
OUTERØ	350mm - 13.8" standard
WIDTH	900mm - 35.5" standard
Film Reel Max Weight	Depending on film reel width, up to 50 kg - 110 lbs
Electronic Platform	Industrial PC
Power Requirement	From 220 to 480 V, 50/60 Hz, 10 kW
Compressed Air	6 bar, 200l/min
Machine Weight	1500 Kg - 3300 lbs

## MAIN FEATURES

Independently driven longitudinal sealing rollers & long-dwell transversal sealing system

In-built MAP gas flushing

Modular design philosophy

Electronic machine with commercial available components

No product no bag

Misplaced detection (product out of phase inside film tunnel)



Maximum flexibility in terms of substrates, granting excellent sealing performances



Extended product shelf life



Easy re-configuration to incorporate additional modules such as a reclosable feature or accessories as double reel mounting, auto splicing, euro hook etc





Higher reliability components  
Easy maintenance



Reduced film waste  
(no empty bag)



No products damaged or trapped by the sealing jaws  
Reduced product waste  
No machine stoppages for out of phase products

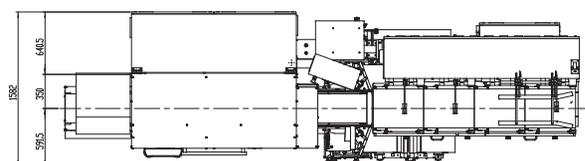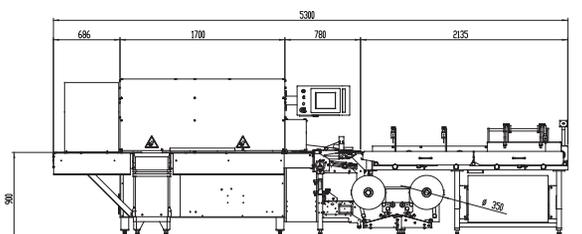

All measurements not specified in inches are given in millimeters.  
Please discuss your needs with our local representative to configure these machines to your product's specific requirements. These specifications are not binding. We reserve the right to change them without prior notice.

Discover more about us, visit:

[www.ilapak.com](http://www.ilapak.com)